

# INSTALLATION INSTRUCTIONS FOR 1137-84

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

READ AND SAVE THESE INSTRUCTIONS

## PREPATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.

## ASSEMBLING THE FIXTURE(Fig.1)

3. Determine the desired hanging height and thread rods (G, H, I, J) onto the nipple (K). Carefully pass the wires through each rod as you assemble. Please remove the nipple if installing with one 6" or 12" rod only.
4. Loosen the screws (D) (Size: #5-32\*0.4"L), and remove the canopy (C).
5. Slip the canopy (C) over the last rod installed, and thread the nipple (F) onto the top of the rod.

## MOUNTING THE FIXTURE (Fig.1)

6. Raise the mounting plate (A) to the junction box (not provided), then secure with the junction box screws (B) (Size: #8-32\*0.6"L). The side of the mounting plate marked "GND" must face out.
7. Install the fixture body into the mounting plate (A) by tilting at a slight angle so that the hanger ball (E) slips into the mounting plate (A) as shown. Align the notch in the hanger ball (E) to the tab on the mounting plate (A) to prevent the fixture from turning.

## CONNECTING THE WIRES (Fig.2)

8. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wires from the hanger ball and mounting plate to it. Otherwise, connect the ground wire from the hanger ball directly to the mounting plate ground wire and secure with the wire connectors provided. After wires are connected, tuck them carefully into the ceiling junction box.

## COMPLETING THE INSTALLATION (Fig. 1)

9. Raise the canopy (C) to the mounting plate (A) and align the mounting screws (D) to the slots (L). Then turn canopy (C) clockwise until mounting screws (D) are in the narrow part of slots (L). Tighten mounting screws (D) with a screwdriver.
10. Install the light bulbs (included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE!)** **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

**Note: Press spring coupling (M) by hand and adjust to the desired length of steel wire (N).**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

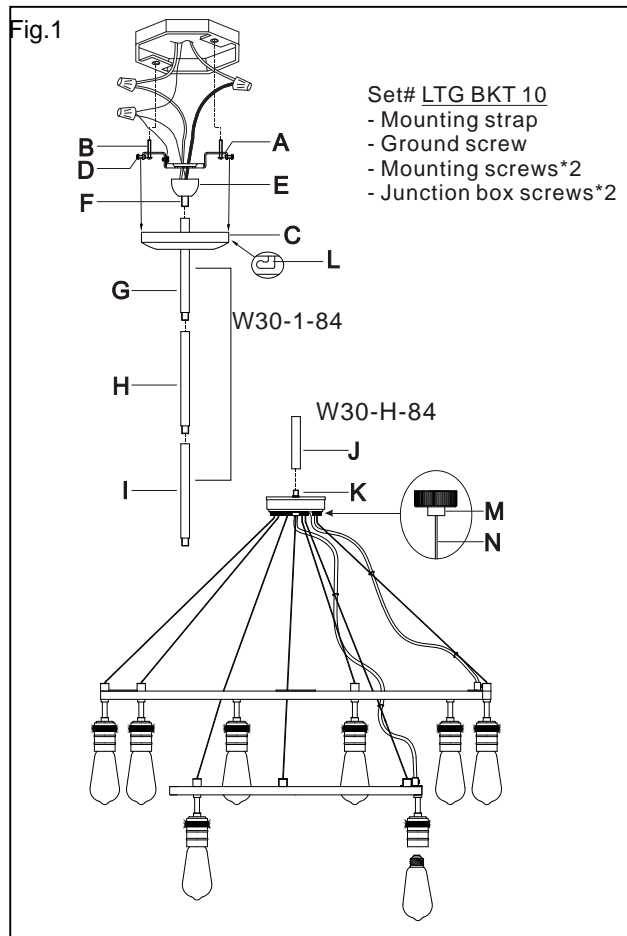


Fig.2

